

COGNEX

Advanced machine vision made easy

The Total Package

Speed, Simplicity,
and Flexibility

DATAMAN 380 SERIES



DATAMAN 380 SERIES FIXED-MOUNT BARCODE READER

Simplify barcode reading operations with a single reader

The DataMan 380 is an image-based barcode reader that provides insightful, actionable data by capturing and tracking important product and package information in high-speed operations.

An extensive field of view (FoV) captures codes across large areas of logistics and manufacturing lines, improving throughput and efficiency by acquiring more barcodes in a single image.

With advanced imaging and decoding technologies supported by artificial intelligence (AI), these robust barcode readers optimize read rates and line speeds in any environment.



Key features



Powerful AI-accelerated decoding

increases throughput during complex, multi-symbology logistics applications by simultaneously processing 1D and 2D codes.



Modular design gives users the flexibility to solve many manufacturing and logistics challenges.



Wide field of view (FoV) simplifies deployments by providing greater scanning coverage in a single reader, reducing the number of required devices.



Edge Intelligence insights offer real-time performance monitoring and analysis to isolate issues and recommend process improvements.



Advanced image formation improves read rates and efficiencies by capturing clean, high-resolution images even when codes are damaged and in poor lighting conditions.

Improve traceability and accelerate throughput across your facility


DataMan 380 readers utilize robust decoding algorithms and advanced image formation technology to capture and read more codes in any environment.

From logistics applications like inbound scanning and ship sorting to automotive applications like tire identification, a single DataMan 380 reader improves throughput and traceability with enhanced image acquisition and exceptional read rates.



Dock door scanning



Ship sorting

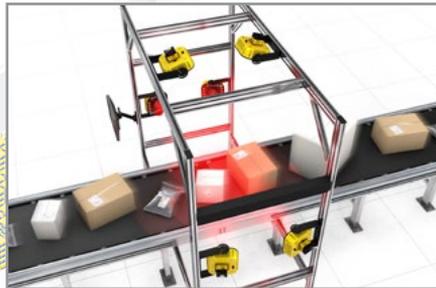

Outbound scanning

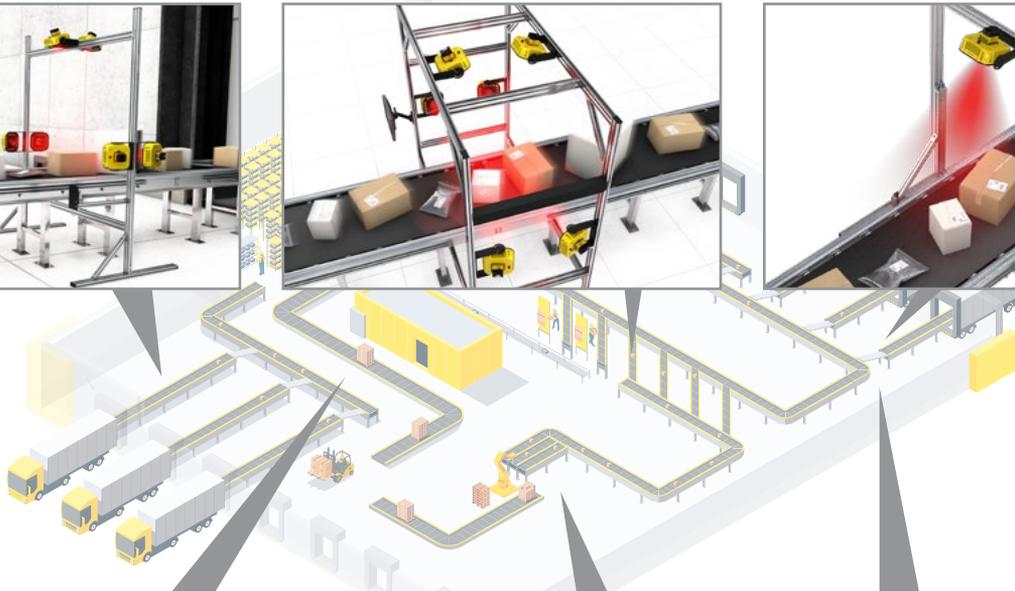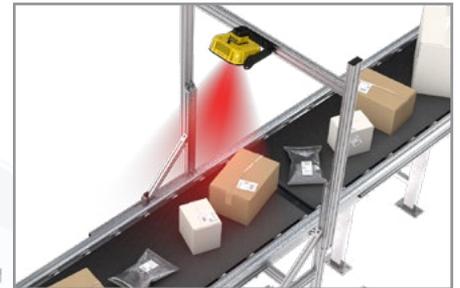

Pallet code reading




Robotic sorting



Hands-free reading

Tire identification

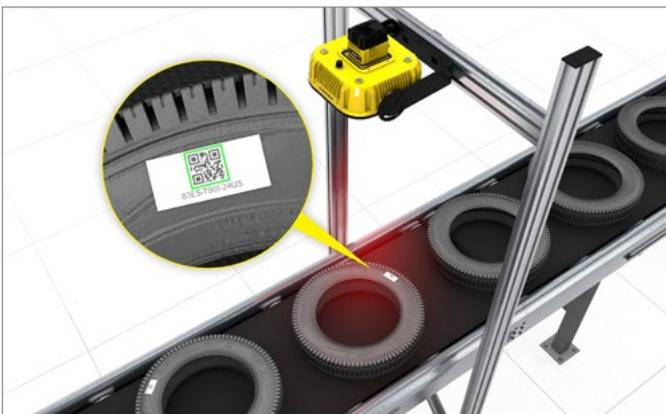

Product aggregation




Have it both ways: high speeds, high read rates


Run your logistics lines at the highest speeds while maintaining exceptional read rates and close package proximity with **1D/2D QuickSort™**. This embedded technology optimizes read rates during high-speed operations by leveraging AI to quickly locate barcodes. The algorithm also enables faster throughput by simultaneously decoding 1D/2D codes.



Maintain high throughput during complex, multi-symbology applications

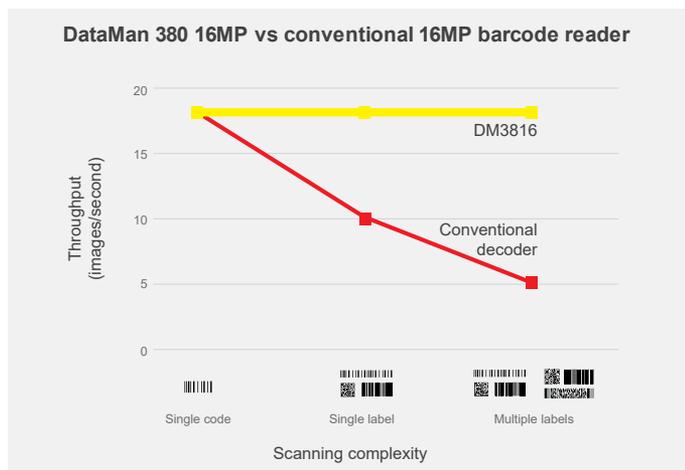

AI locates barcodes, increasing decoding efficiency

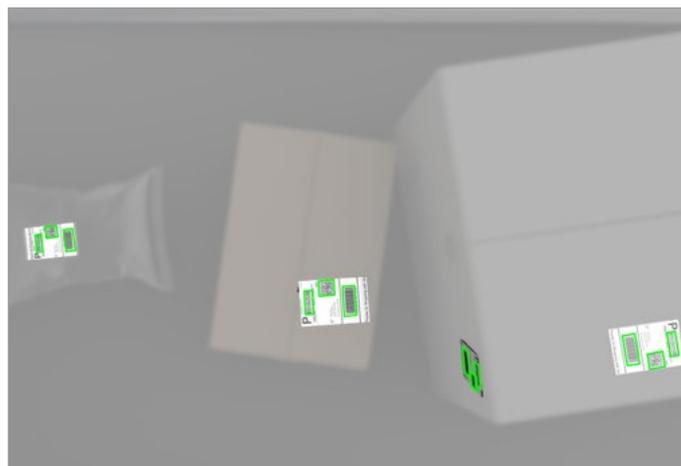

One device offers greater traceability and throughput

Improve throughput with an extensive FoV that covers larger surface areas across manufacturing and logistics lines. The combination of a high-resolution imager and advanced decoding technologies simplifies barcode reading operations in various applications.

Dependable reading in any environment

Preserve high read rates by decoding obscured, hard-to-read codes. Advanced image formation technologies decipher codes in low-contrast environments and quickly adapt to variable package dimensions, even when codes are damaged.



See more codes with every shot

High Dynamic Range Plus (HDR+) automatically increases contrast to create a more uniform image, enabling greater depth-of-field, faster line speeds, and improved material handling.

Short gaps between packages make uniform lighting difficult



No HDR: reads two of the six codes





With HDR+: reads all six codes



Instantly adapt to irregular shapes

High-Speed Liquid Lens (HSLL) technology facilitates high-speed, high-variability applications by dynamically autofocusing the reader without mechanical parts.

Enhance the reader's coverage and minimizes exposure times for greater throughput.

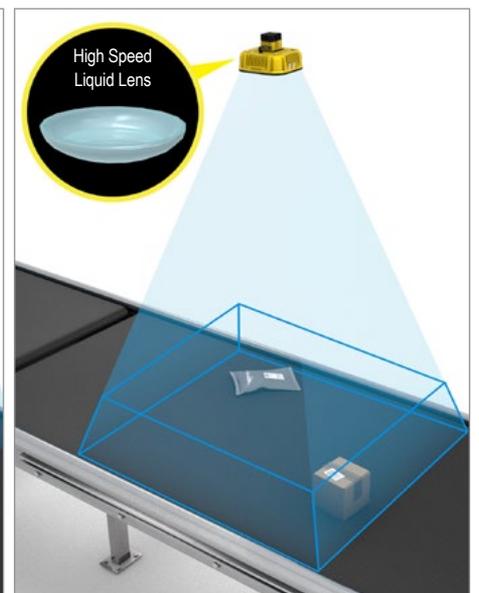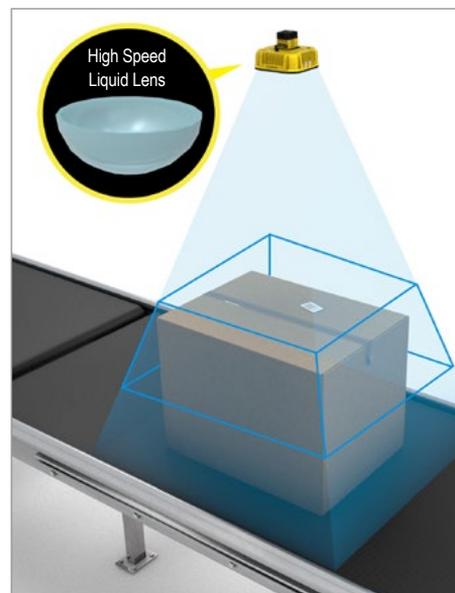

Extensive coverage and seamless deployments through advanced technology


The DataMan 380 is embedded with leading image formation and decoding technology, ready to increase throughput and read rates out of the box. Modular lighting options maximize flexibility and simplify deployments.

High-Powered Integrated Torch (HPIT) maximizes scanning coverage and minimizes exposure times for greater throughput. Red and white lighting options illuminate codes in various lighting conditions.

C-mount lens and HSL options maximize application coverage

High resolution sensors enable greater field-of-view and depth-of-field coverage


Distance sensor to dynamically focus the lens or trigger the reader



Guided laser aimer allows field-of-view to be clearly mapped to the desired target.



Multi-color LED indicators provide operator feedback

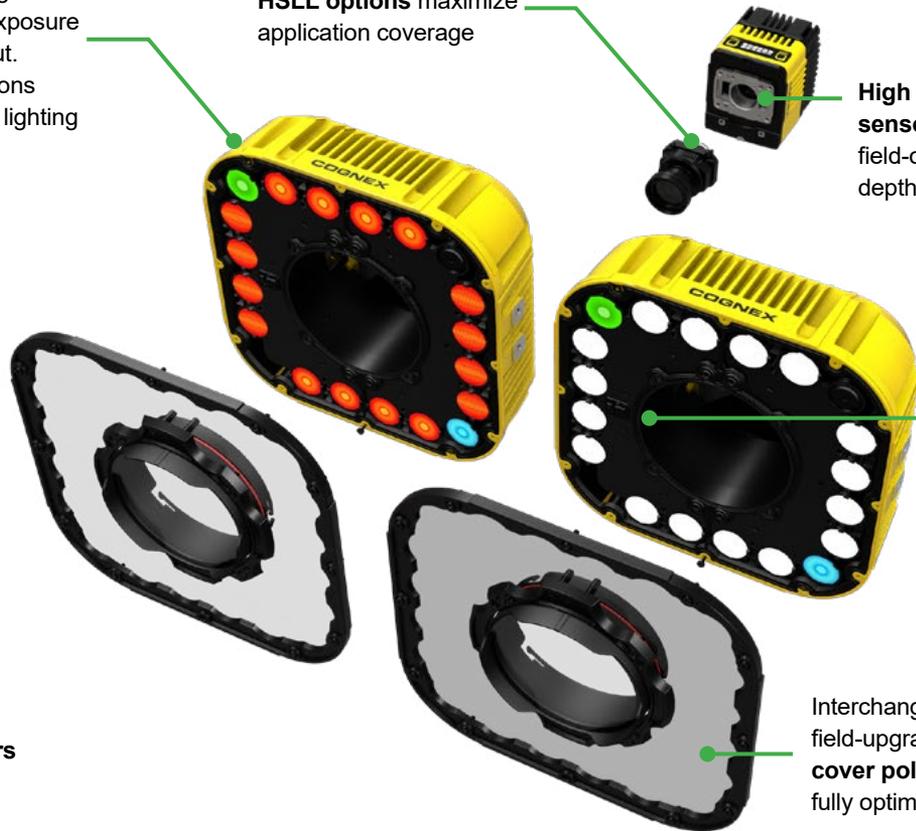

Interchangeable, field-upgradeable **front cover polarization filters** fully optimize image quality

Scalable, full-coverage reading

Synchronize multiple barcode readers to extend your field of view or simultaneously capture every side of an object for multi-side barcode reading.

Multi-reader sync (MRS) technology seamlessly increases reading coverage by enabling a primary reader to collect data from secondary readers and communicate the results to a control system.

Synchronized code reading and image offload



DATAMAN 380 SERIES SPECIFICATIONS




Lens Type	C-Mount, Cognex High Speed Liquid Lens Autofocus
Trigger	1 opto-isolated, acquisition trigger input.
Discrete Inputs	1 opto-isolated, acquisition trigger input. Up to 3 general-purpose inputs when connected to the Breakout cable. $V_{IL} \leq \pm 6 \text{ V}$ $V_{IH} \geq \pm 12 \text{ V}$ $I_{TYP} : 4.2 \text{ mA @ } 24 \text{ V}$
Discrete Outputs	Up to 4 outputs when connected to the Breakout cable. $I_{MAX} : 50 \text{ mA}$ $V_{OL} \leq \pm 3 \text{ V @ } 50 \text{ mA}$
Status LEDs	Pass/Fail LED and Indicator Ring, Network LED, and Error LED.
Codes	1D barcodes: Codabar, Code 39, Code 128, Code 93, Code 25, Interleaved 2 of 5, UPC/EAN/JAN 2D barcodes: Data Matrix (ECC 0, 50, 80, 100, 140, and 200), QR Code, PDF 417, MaxiCode
Network Communication	2 Ethernet ports, 10/100/1000 BaseT with auto MDIX. IEEE 802.3 TCP/IP Protocol. Supports DHCP, static, and link-local IP address configuration. One port supports TSN networks. RS-232: Rx/D, Tx/D according to TIA/EIA-232-F
Power Consumption	24 V DC +/- 10% LPS or NEC class 2 Power consumption without USB device attached: Average $\leq 15 \text{ W}$ without illumination Average $\leq 40 \text{ W}$ with illumination Peak $\leq 2 \text{ A}$
Power Output	24 V DC at 1.0 A maximum to external light.
Material	Die-cast and extruded aluminum housing.
Finish	Painted.
Mounting	Four M3 threaded mounting holes. Pattern: 38.5 × 58.5 mm (1.52 × 2.60 in)
Weight	DataMan 380 with no accessories attached: 775 g (27.3 oz).
Case Temperature	0° C to 40° C (32° F to 122° F)
Storage Temperature	-20° C to 80° C (-4° F to 176° F)
Humidity	< 95% non-condensing

DATAMAN 380 SERIES IMAGE SENSOR SPECIFICATIONS




	DM3808	DM3812	DM3816
Sensor Type	1/1.1-inch CMOS	1/1.1-inch CMOS	1.1-inch CMOS
Image Sensor Properties	Diagonal size: 11.1 mm Pixel size: 2.74 μm (H) x 2.74 μm (V)	Diagonal size: 14 mm Pixel size: 2.74 μm (H) x 2.74 μm (V)	Diagonal size: 16.8 mm Pixel size: 2.74 μm (H) x 2.74 μm (V)
Maximum Image Resolution (pixels)	2840 × 2840 (8.06 MP)	4096 × 3000 (12.28 MP)	5320 × 3032 (16.13 MP)
Electronic Shutter Speed	Minimum exposure: 15 μs Maximum exposure: 200 ms		

Field of view diagrams

Working distances
Units: mm (in)

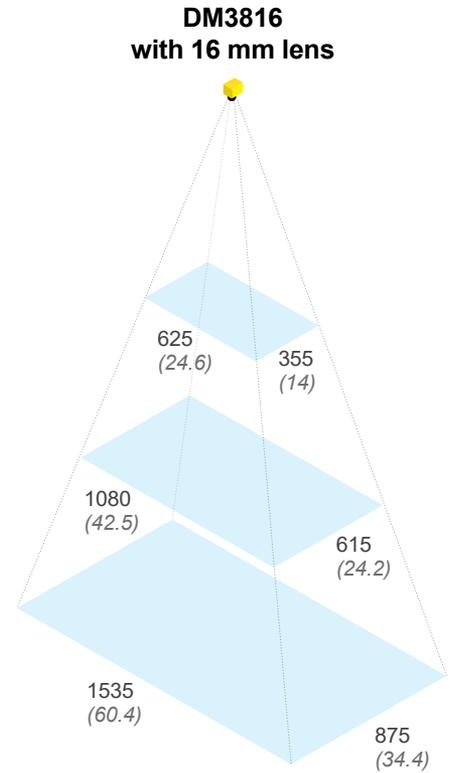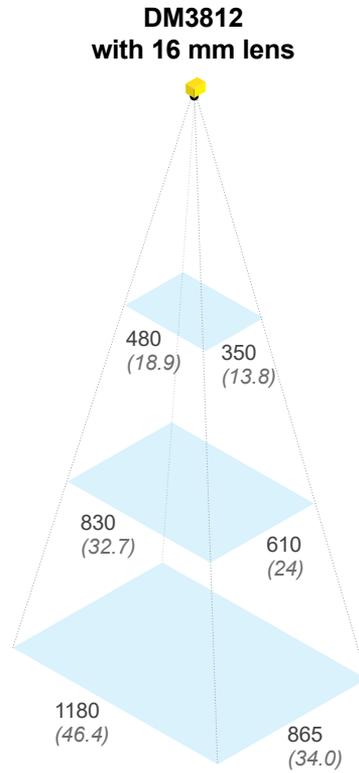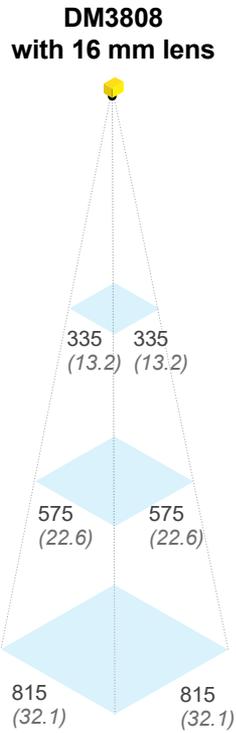

Working distances
Units: mm (in)

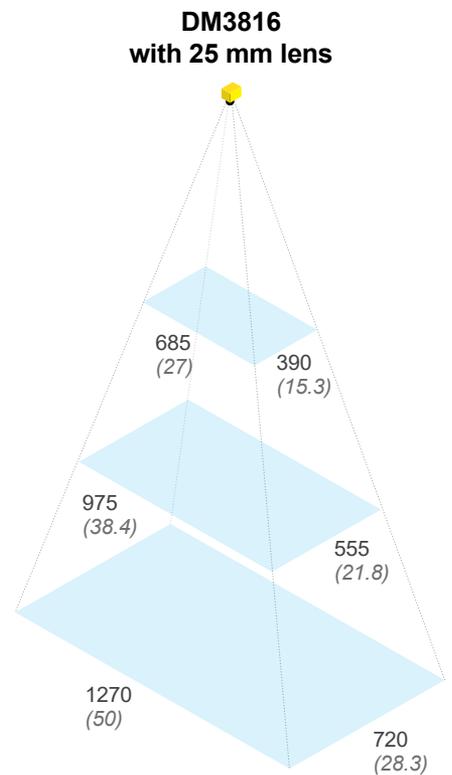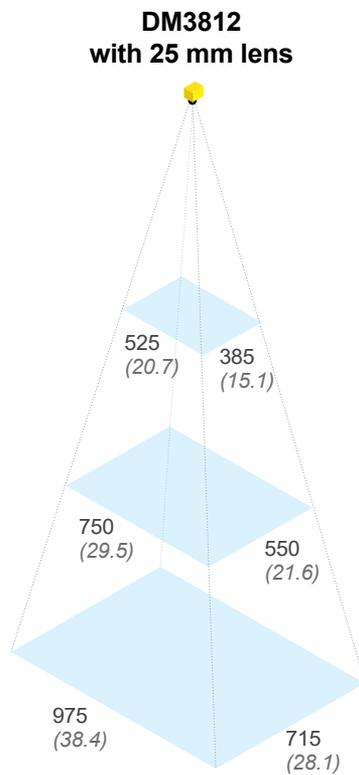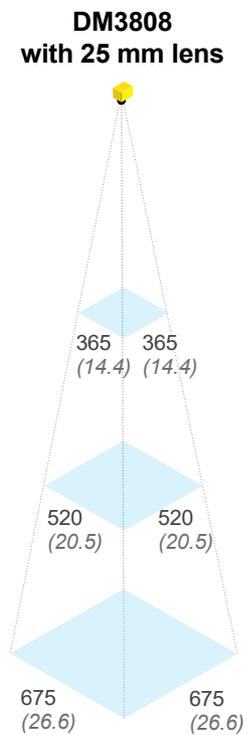



Please contact Cognex sales for part numbers and pricing on the configuration options below.

cognex.com/sales

DATAMAN 380 KITS

	Resolution	Software	Lens	Focus	Illumination
	8 MP 12 MP 16 MP	1D/2D omnidirectional code reading	16, 25, 35 mm C-mount or High-Speed Liquid Lens + lens cover	Custom pre-focus (optional)	Integrated or external illumination (red or white)


MOUNTING BRACKETS

	Product ID	Description
	DMBK-PIVOT-DM380	Pivot mounting bracket
	DMBK-PVT-HPIT-380	U-shaped mounting bracket for use with HPIT

LENSES

	Lens Product ID	Lens Cover Product ID	Description
	CLN-C16F06-UR	COV-380-CMNT-45	16 mm f6.5.5 C-mount lens
	CLN-C25F06-UR	COV-380-CMNT-45	25 mm f6.5.5 C-mount lens
	LEC-86571	COV-380-CMNT-60	16 mm var. aperture C-mount lens
	LEC-86572	COV-380-CMNT-60	25 mm var. aperture C-mount lens
	LEC-86573	COV-380-CMNT-75	35 mm var. aperture C-mount lens
	CLN-C16F65-HSLL-HR	COV-380-CMNT-60	16 mm f6.5 High Speed Liquid Lens
	CLN-C25F65-HSLL-HR	COV-380-CMNT-60	25 mm f6.5 High Speed Liquid Lens
	CLN-C35F06-HSLL-HR	COV-380-CMNT-60	35 mm f6 High Speed Liquid Lens

*Recommended Cognex IO components required for standalone DataMan 380 installations

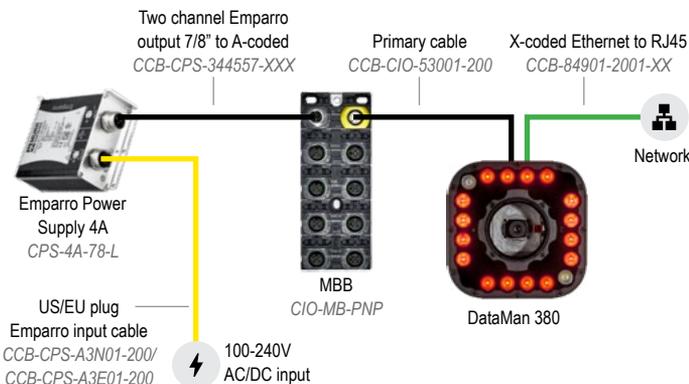






COGNEX IO

	Product ID	Description
	CPS-4A-78-L*	Emparro Power Supply 4A 7/8"- L
	CPS-8A-78-L	Emparro Power Supply 8A 7/8" - L
	CIO-MB-PNP*	Master Breakout Board (MBB)
	CIO-PD-4	Power Distribution Board (PDB)
	CIO-HS-4	Hybrid Switch (HS)
	CCB-CPS-A3N01-200/ CCB-CPS-A3E01-200*	US plug Emparro input or EU plug Emparro input (2 m)
	CCB-CIO-40021-XX	External/light cable (1-4 m)
	CCB-CPS-344557-XXX	Two channel Emparro output 7/8" to A-coded (0.5 m, 1-5 m)
	CCB-CIO-53001-200*	Primary cable 12 pin (2 m)
	CCB-CIO-P4141-XX	L-coded power chain (0.5 m, 1-5 m)
	CCB-84901-2001-XX*	X-coded Ethernet to RJ45 (2 m, 5 m, 10 m, 15 m)
	CCB-CIO-51001-XX	X-coded Ethernet chain (0.5 m, 1-5 m, 10 m, 15 m)
	CCB-CIO-40507-XX	Power cable (0.5 m, 1-5 m)
	CCB-CIO-X0116-XX	Two channel A-coded to A-coded (0.5 m, 1-5 m)
	CCB-PWRIO-XX	Power and I/O breakout cable, M12-12 to flying lead (5 m, 10 m, 15 m)

Dimensions






DataMan 380 base unit

[Download CAD files](#)

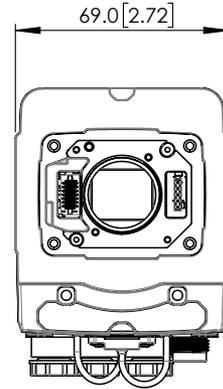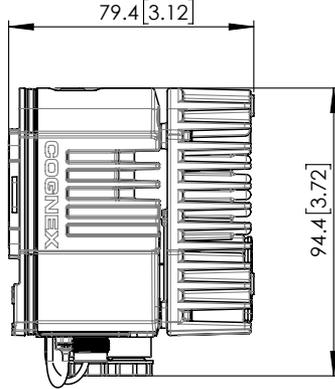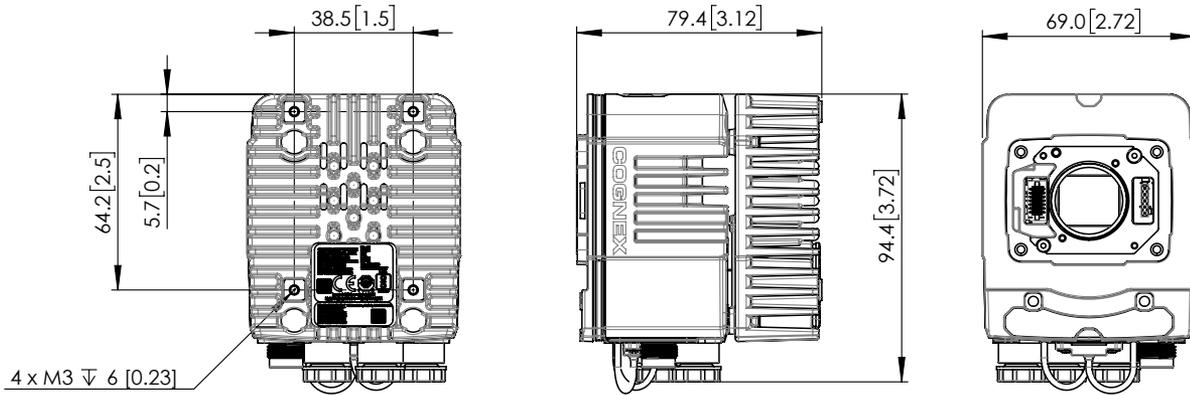


DataMan 380 with 45 mm lens cover

[Download CAD files](#)

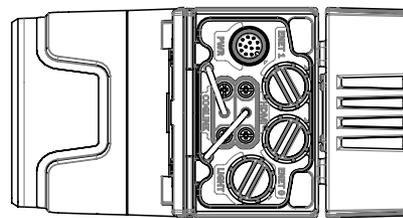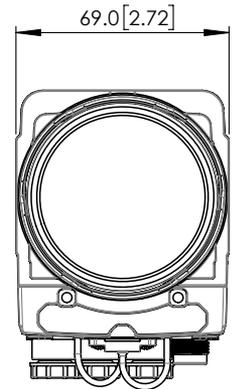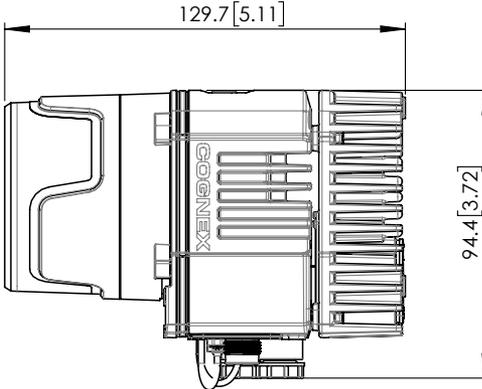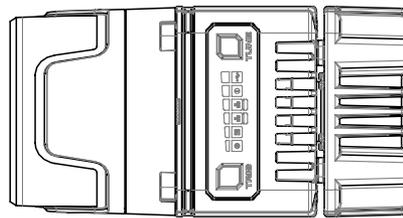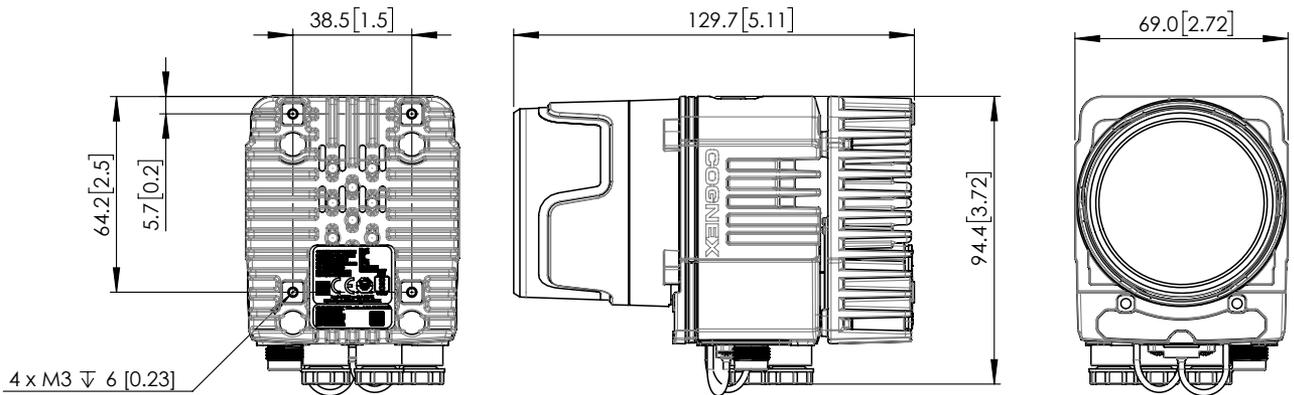

DataMan 380 with HPIT

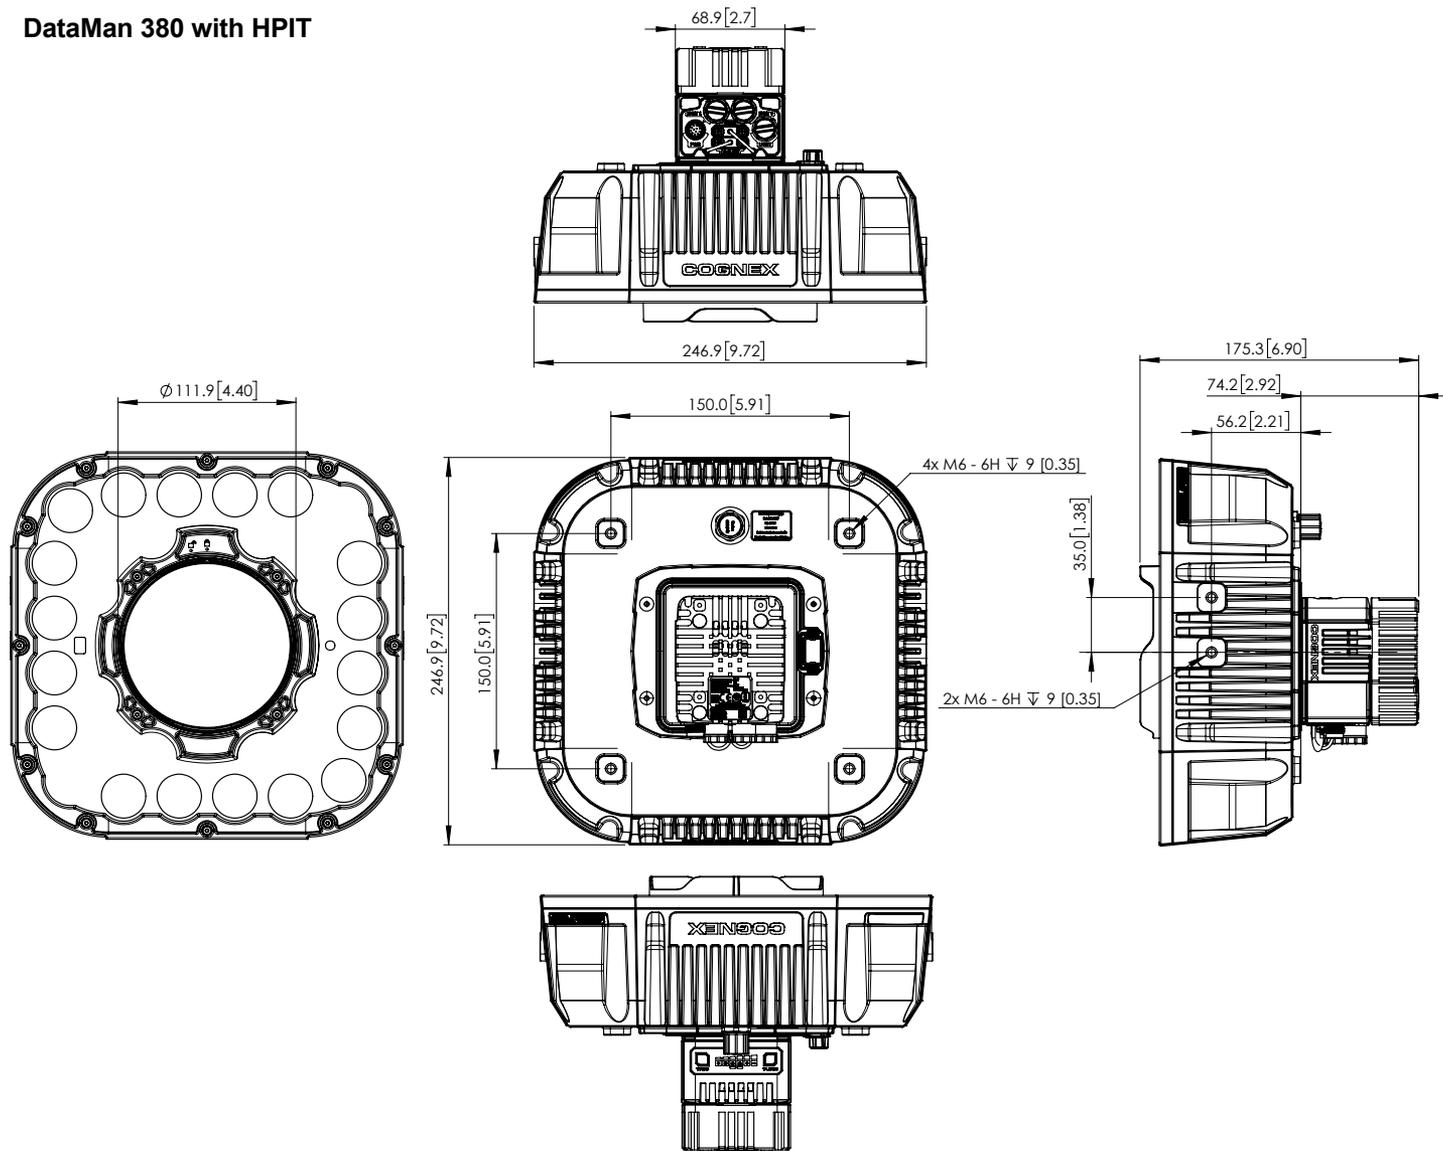

COGNEX

Companies around the world rely on Cognex vision and barcode reading solutions to optimize quality, drive down costs, and control traceability.

Corporate Headquarters One Vision Drive Natick, MA 01760 USA

Contact us or find your regional sales office:
www.cognex.com/sales

Americas

North America +1 855 426 4639
Brazil +1 855 426 4639
Mexico +52 552 789 5444

Europe

Austria +49 721 958 8052
Belgium (FR) +33 176 549 318
France +33 176 549 318
Germany +49 721 958 8052
Ireland +353 21 601 9005
Italy +39 02 9475 4345
Spain +34 93 220 6237
Switzerland (DE) +49 721 958 8052
Switzerland (FR) +33 176 549 318
United Kingdom +353 21 601 9005
Other Europe +353 21 601 9005

Asia-Pacific

China +86 021 8036 5424
India +91 7305 040397
Japan +81 345 790 266
Korea +82 070 4784 4038
Singapore +65 3158 2511
Taiwan +886 801 492 017
Other Asia-Pacific +65 3158 2511

© Copyright 2025, Cognex Corporation.
All information in this document is subject to change without notice. All Rights Reserved. Cognex is a registered trademark of Cognex Corporation. 1D/2D QuickSort is a trademarks of Cognex Corporation. All other trademarks are property of their respective owners. Lit. No. DM380DS-03-2025

www.cognex.com